


- C1:VCC
- C2:RST
- C3:CLK
- C4:RESERVED
- C5:GND
- C6:VPP
- C7:I/O
- C8:RESERVED

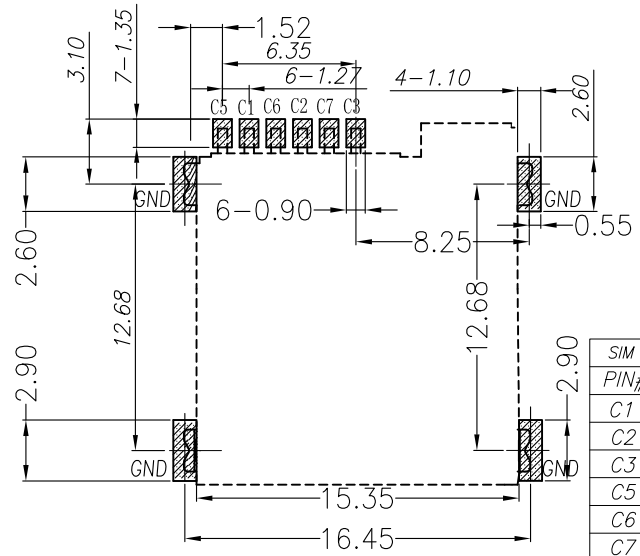

SIM pin assignment	
PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出

NOTES:

MATERIAL:

Insulator: LCP,UL94V-0;Color:Black  
 Contact: Copper Alloy  
 SHELL: SUS

PLATING:


Contact: Plated 50u" Ni Over all Contact Au 1U  
 Shell: Plated 50u" Ni Overall  
 Plated 1u"Au Selective Contact Area

Electrical:

Current Rating :0.5A .  
 Voltage Rating :30V AC/DC  
 Ambient Temperature Range :-20°C~+60°C  
 Storage Temperature Range :-40°C~+85°C  
 Ambient Humidity Range :95% R.H. Max.  
 Contact Resistance:100mΩ max.  
 Insulation Resistance:1000MΩ min./500VDC  
 Peak SMT temp.:260°C±5°C  
 Mating Cycles:1500Min Insertions

RECOMMENDED PCB LAYOUT  
 GENERAL TOLERANCE ±0.05

Tolerance	Model Name: MICRO-SIM 卡座PUSH/PUSH 6PIN 1.35H LCP黑色			Drawing: 黄海祥
X.X ±0.30	Model No: WLS0-017A			Checked: 姚世宣
X.XX ±0.25	UNIT:	SCALE:	REVISION:	Approved: 李建
X.XXX ±0.15	mm	FULL	A	Date: 2016.03.18
Angle ±2.0°	DWG NO.			FILE: C



**WLCO** 深圳市兴万联电子有限公司  
 SHENZHEN XINGWANLIAN TECHNOLOGY CO, LTD